



Electric Feedthroughs Series

Material : Conductor : OFE Copper

Flange : S.S 304


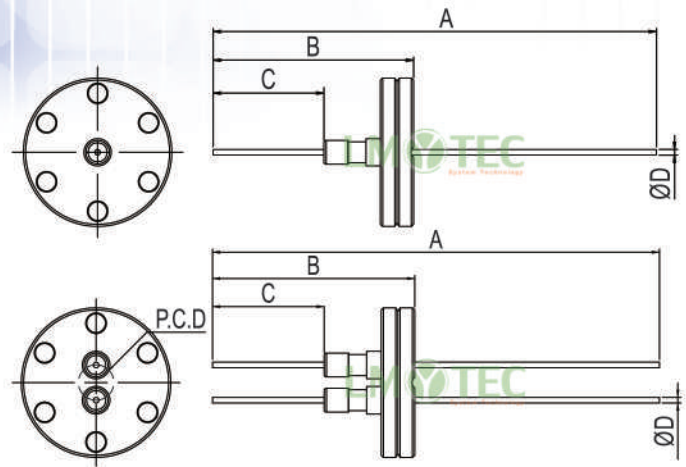
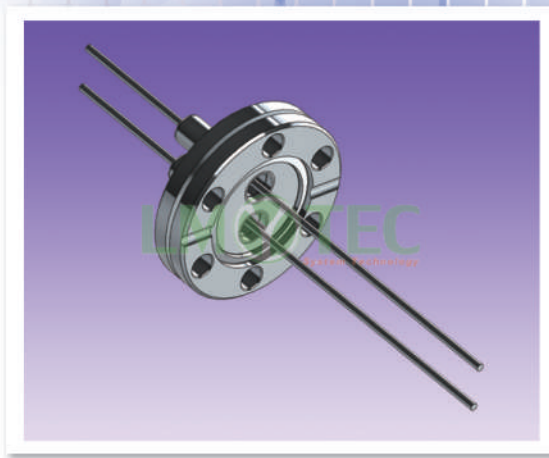


FIG. 1



FIG. 2
1 pairs



FIG. 3



FIG. 4




FIG. 5
1 pairs

CF Type

KF Type

LIMYTEC reserve the right to change the specification without notice

Unit:mm

Flange Size	FIG.	Model No.	A	B	C	ØD	P.C.D	Amps	V(DC)
CF 1.33"	1	LM F30010-ESA	102	46	25	1.3	-	27	2K
	1	LM F30020-ESA	197	58.7	25	2.4	-	55	5K
	1	LM F30030-ESA	184	80.9	25	6.4	-	185	12K
	2	LM F30010-EDA	102	46	25	1.3	8	27	3K
CF 2.75"	1	LM F31020-ESA	197	59.2	25	2.4	-	55	5K
	1	LM F31030-ESA	184	81.4	25	6.4	-	185	12K
	1	LM F31040-ESA	184	99.8	25	19.1	-	800	8K
	2	LM F31020-EDA	197	59.2	25	2.4	19.1	55	5K
	2	LM F31030-EDA	184	81.4	25	6.4	19.1	185	12K
KF16	3	LM F11010-ESA	102	47	25	1.3	-	27	2K
	3	LM F11020-ESA	197	59.7	25	2.4	-	55	5K
	5	LM F11010-EDA	102	50	25	1.3	8	27	3K
KF25	4	LM F12010-ESA	102	47	25	1.3	-	27	2K
	4	LM F12020-ESA	197	59.7	25	2.4	-	55	5K
	4	LM F12030-ESA	184	81.9	25	6.4	-	185	12K
	5	LM F12010-EDA	102	56.6	36	1.3	7.9	27	3K
KF40	5	LM F13020-EDA	197	59.7	25	2.4	19.1	55	5K
	5	LM F13030-EDA	184	81.9	25	6.4	19.1	185	12K