



Signal Feedthroughs Series

BNC Coaxial CF Flange

Material : Conductor : OFE Copper
Flange : S.S 304


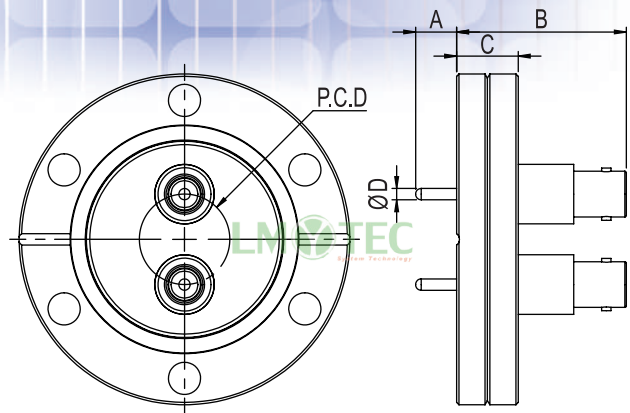
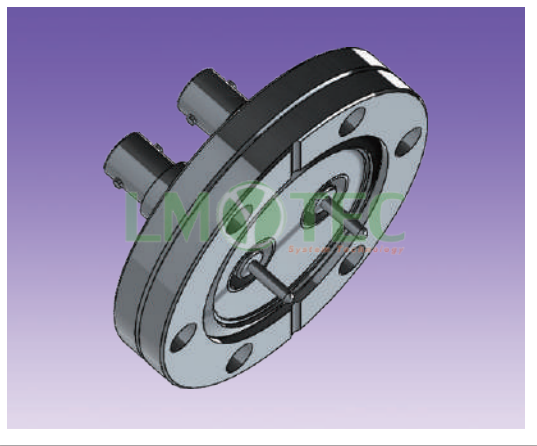


FIG. 1
1 pin



FIG. 2
2 pins




FIG. 3
3 pins




FIG. 4
4 pins

LIMYTEC reserve the right to change the specification without notice

Unit:mm

Flange Size	FIG.	Model No.	A	B	C	Ø D	P.C.D	Amps	V(DC)
CF 1.33"	1	LM F300-CXQSA	8.7	35.8	7.6	2.4	-	3.6	500
CF 2.75"	1	LM F310-CXQSA	8.7	35.8	13	2.4	-	3.6	500
	2	LM F310-CXQDA	8.7	35.8	13	2.4	19.1	3.6	500
	3	LM F310-CXQTA	8.7	35.8	13	2.4	19.1	3.6	500
	4	LM F310-CXQQA	8.7	35.8	13	2.4	23	3.6	500

