



Thermocouple Feedthroughs Series

Material : Conductor : K Type TC
Flange : S.S 304

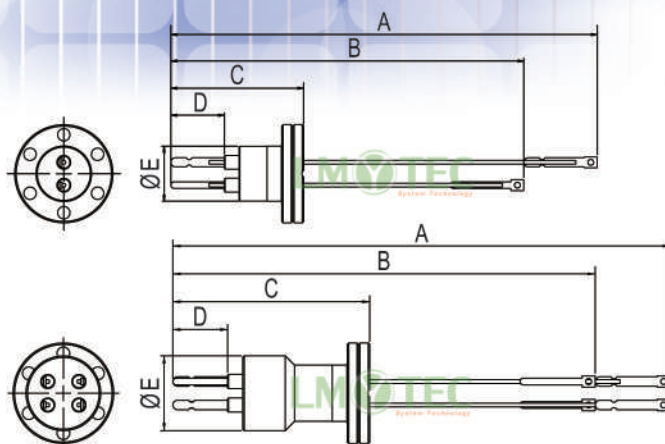
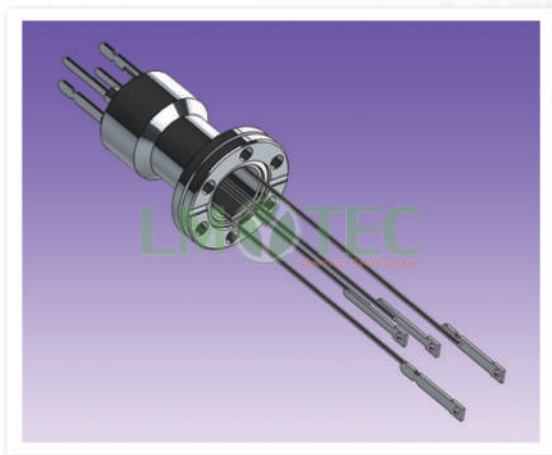


FIG. 1
1 pairs




FIG. 2
2 pairs




FIG. 3
1 pairs




FIG. 4
2 pairs

CF Type

KF Type

LIMYTEC reserve the right to change the specification without notice

Unit:mm

Flange Size	FIG.	Model No.	A	B	C	D	ØE	Type
CF 1.33"	1	LM F300-TCSA	148	122	46	19	19	K
	2	LM F300-TCDA	168	143	66.6	18.5	25.3	K
CF 2.75"	1	LM F310-TCSA	148	122	50.3	19	19	K
	2	LM F310-TCDA	168	143	55.9	18.5	25.3	K
KF 25	3	LM F120-TCSA	148	122	35.8	19	40	K
	4	LM F120-TCDA	168	143	56.4	18.5	40	K
KF 40	3	LM F130-TCSA	148	122	35.8	19	55	K

* K Type Thermocouple / Temperature Range : 0°C ~ 1250°C

