




XY Stages

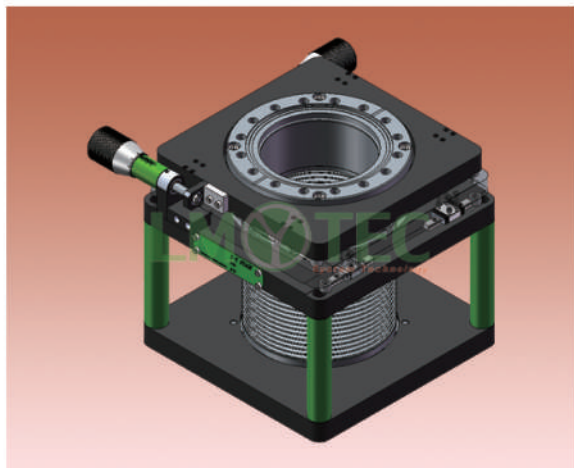

Features

- * ± 13 mm off center XY motion
- * 2.75 to 6 inch bore diameters
- * Manual actuators
- * UHV compatible materials
- * Welded bellows seal
- * Bakeable to 150°C

Specifications

Material :

Body : Aluminum


Flange : S.S 304

Bellows : AM350

Dimensions : See table

Vacuum Range : 1 atm to 10^{-11} Torr

Temperature Range : -20°C to 230°C

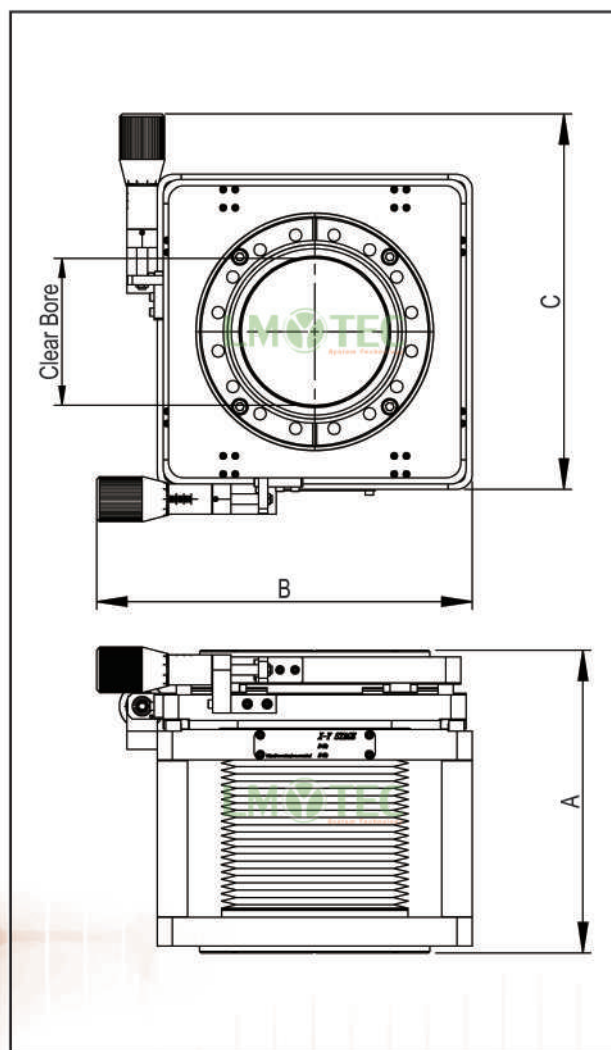



Dimension

LIMYTEC reserve the right to change the specification without notice

Unit:mm

Flang Size	Model No.	Z Stroke	Clear Bore	A	B Min - Max		C Min - Max	
CF 2.75"	LM T310-C2MUE	26	34.8	161	188	214	183	209
CF 4.5"	LM T320-C2MUE	26	59.5	176	198	224	198	224
CF 6"	LM T330-C2MUE	26	97	200	235	261	235	261