



Signal Feedthroughs Series

BNC Coaxial KF Flange

Material : Conductor : OFE Copper

Flange : S.S 304

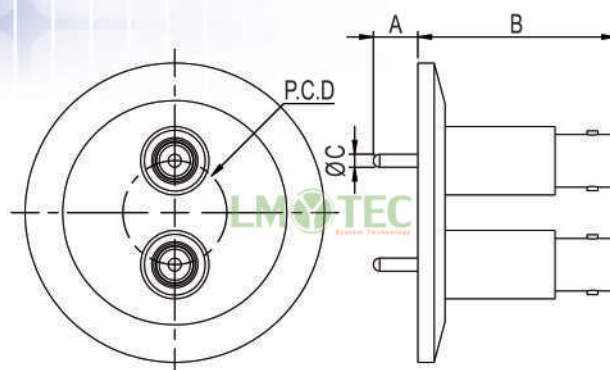


FIG. 1
1 pin



FIG. 2
2 pins



FIG. 3
3 pins



FIG. 4
4 pins

LMYTEC reserve the right to change the specification without notice

Unit:mm

Flange Size	FIG.	Model No.	A	B	ØC	P.C.D	Amps	V(DC)
KF 16	1	LM F110-CXQSA	8.2	36.3	2.4	-	3.6	500
KF 25	1	LM F120-CXQSA	8.2	36.3	2.4	-	3.6	500
	2	LM F120-CXQDA	8.2	36.3	2.4	19.1	3.6	500
KF 40	1	LM F130-CXQSA	8.2	36.3	2.4	-	3.6	500
	2	LM F130-CXQDA	8.2	36.3	2.4	19.1	3.6	500
	3	LM F130-CXQTA	8.2	36.3	2.4	24.1	3.6	500
	4	LM F130-CXQQA	8.2	36.3	2.4	24.1	3.6	500